


FIBRECAST EDGE GRAIN MODULE (EGM)

The FibreCast Edge Grain Module (EGM) is an edge-grain layered module designed for standard parquet construction techniques.

They are constructed from high purity spun ceramic fiber blanket. The EGM incorporates a one-shot weld and bolt system complete with #304 stainless steel weld pin, yoke and two (2) support tubes. The fiber blankets are secured with plastic retaining caps on the end of the support tubes.

The EGMs can also be manufactured using Hi-Alumina, soluble or mineral wool fibers to meet any design condition. Hardware can be adjusted for a self-tapping screw, threaded stud or power actuated charge shot.

Standard size is a nominal 12" by 12", although other custom sizes are available upon request.

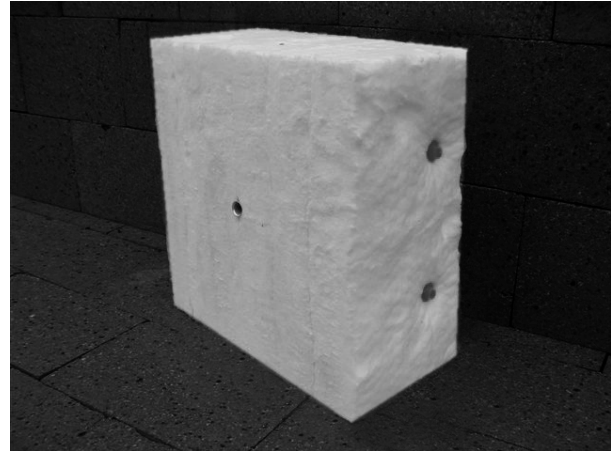

AVERAGE CHEMISTRY

	<u>HP</u>	<u>ZR</u>
Al ₂ O ₃	45%	30%
SiO ₂	55%	53%
ZrO ₃	-	16%
Other	Trace	Trace

TEMPERATURE USE LIMITS

	<u>DESIGN</u>	<u>OPERATING LIMIT</u> *
HP	2300°F	2150°F
ZR	2600°F	2450°F

* Thickness & Density dependent.

SHRINKAGE (%)

	<u>HP</u>	<u>ZR</u>
@ 1600°F	0.5	-
@ 1800°F	1.0	-
@ 2000°F	2.0	1.5
@ 2200°F	-	2.4
@ 2400°F	-	2.8

SPECIFICATIONS (EGM)


SIZES:	12" X 12" Nominal
THICKNESSES:	4" to 12", in 1" increments
DENSITIES:	6, 8 & 10 PCF
ANCHOR SYSTEM:	1SAS, STS, TS, PACS.

PRICING & ORDER INFORMATION

TYPE – THK. – SIZE – FIBRE TYPE – DENSITY – ANCHOR SYSTEM

e.g. EGM – 6" – 12" X 12" – HP – 10# – 1SAS

TYPICAL INSTALLATION

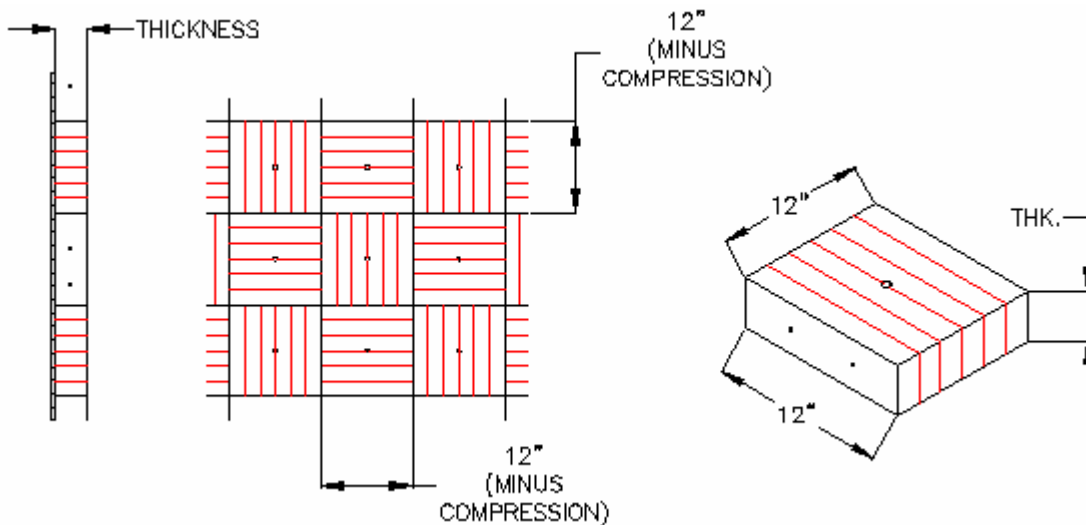

Data listed are average and are subject to variation. Results should not be used for specification purposes. Subject to change without notice.

FibreCast Inc.,
3264 Mainway,
Burlington, Ontario L7M 1A7 Canada

Telephone: 905-319-1080
Fax: 905-319-7611
E-mail: sales@fibrecast.com

MADE IN CANADA